

## LifePO4 LITHIUM ION

POWER LITHIUM BATTERIES		
Lithium Iron Phosphate (LiFePO4) Battery		
LFP12.8V300AH-SL		12.8V300AH 3840Wh
Features of LiFePO4 Battery		
Longer Cycle Life LiFePO4 batteries would be is five times than SLA batteries on cycle life High Power & Light weight LiFePO4 batteries performance twice power of SLA batteries, while half weight helpful for transport and installation Intelligent management control Intelligent BMS system covered by LFP batteries to ensure that batteries work on safety and perfect condition Lower Self-discharge rate Lower Self-discharge rate to guarantee LFP batteries be stored more longer than SLA batteries		
Physical Dimension		Applications
		<ul> <li>Caravan, RV, camping</li> <li>UPS (replacement of SLA batteries)</li> <li>Marine, golf cart</li> <li>Solar, wind system</li> <li>PV ,solar light</li> </ul>
	Chemistry	LiFePO4
Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	300Ah (C5,25°C)
	Energy	3840Wh
	Internal Resistance	≤10 mΩ
	Cycle Life	>2000 cycles @1C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96-99% @1C
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode	0.2C to 14.6V, then 14.6V, charge current to 0.02C (CC/CV)
	Charger Current	150A
	Max. Charge Current	200A
	Charge Cut-off Voltage	15.6V±0.2V
Standard Discharge	Rated Discharge Current	150A
	Max Discharge Current Max. Pulse Current	200A
	Discharge Cut-off Voltage	900A(<3s) 10V
	Charge Temperature	0 °C to 45 °C (32Fto 113F) @60±25% Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	0 °C to 40 °C (32Fto 104F) @60±25% Relative Humidity
	Water Dust Resistance	IP65
Mechanical	BMS	4S/4P
	Plastic Case	SPCC
	Dimensions (in./mm.)	770*285*113 mm
	Weight (lbs./kg.)	32.5kg(71.50lbs)
	Terminal	Anderson Connectors
	•	1 1




CE

POWERCELL TECHNOLOGY





LifePO4 LITHIUM ION

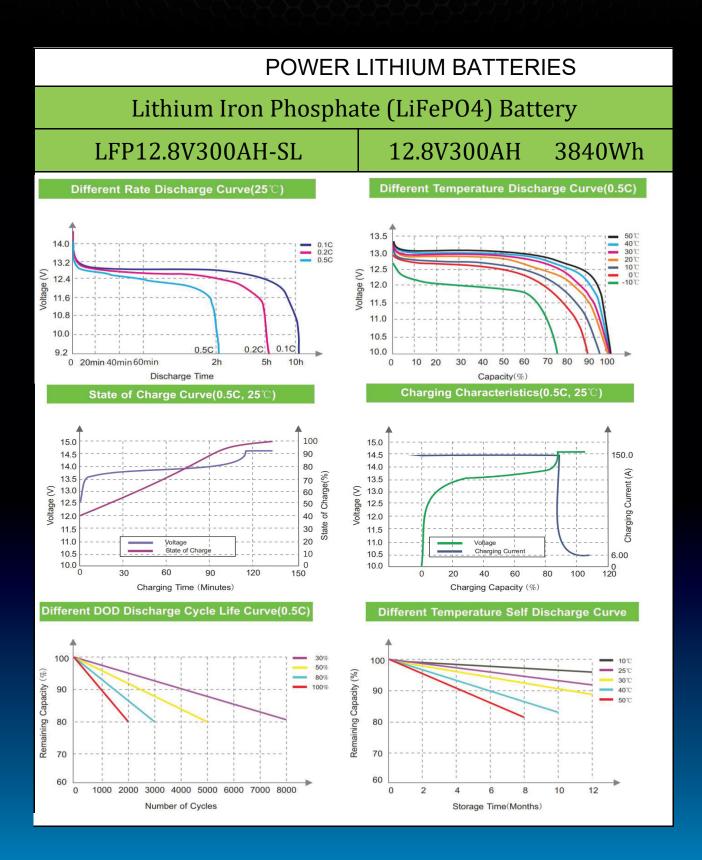



POWERCELL TECHNOLOGY

