


DUAL PURPOSE

DEEP CYCLE STARTING

NPCDP12VN70ZZLM



Dimensions (mm)

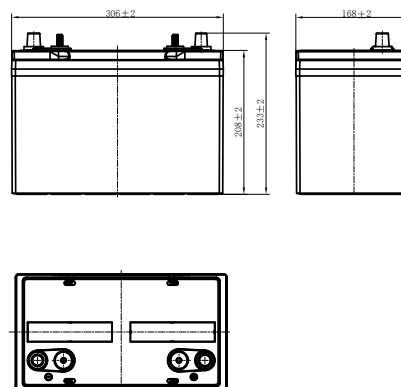

Physical Specification


Nominal Voltage		12V
Nominal Capacity(20HR)		110Ah
Dimension	Length	306±2mm(12.05inches)
	Width	168±2mm(6.61inches)
	Container Height	208±2mm(8.19inches)
	Total Height(with Terminal)	233±2mm(9.17inches)
Weight		Approx 28.5Kg(62.84lbs)
Terminal Type		Marine Twin
Cell layout		0
Hold-Down		B0
Cell plate qty		/
Case		Blue-PP Material
Cover		Blue-PP Material
Handle		Blue-PP Material

Electrical Specification

Rated Capacity	20 hour rate(4.6A)	110Ah
Reserve Capacity	200min	
Cold Cranking Performance Amps@0°F(-18°C)	800A	

Terminals

Cell Layout

Terminal Type	Marine Twin
	




Figure (0)

Figure (0)

Discharge Characteristics(-18°C,0°F)

NPCDP12VN70ZZLM (CCA-SAE)
CCA-SAE(@-18)with I=800A
Spec $U_{105} \geq 7.5V$ $U_{305} \geq 7.2V$

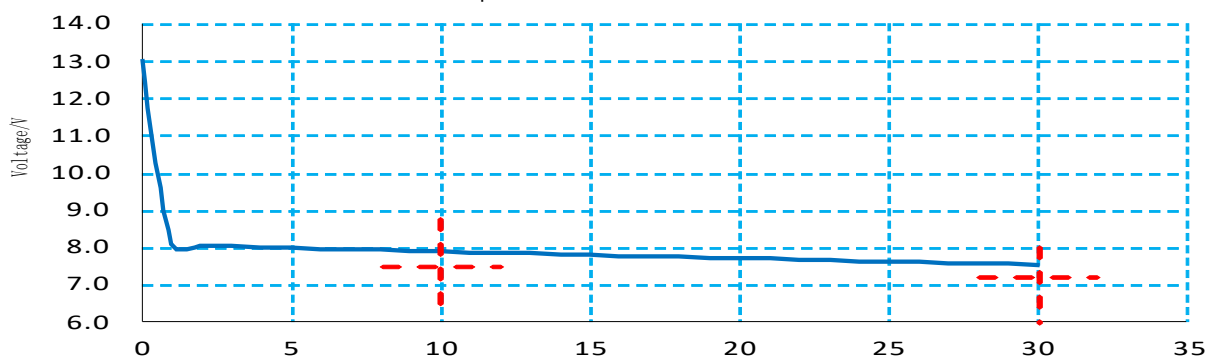

*Values are subject to variation of +/- 5% in normal manufacturing processes.
*Technical specifications and the product line above could be changed without prior notice.