

POWER AGM


STOP START

DUAL PURPOSE BATTERY

NPC-iSS35H CCA500 40AH RC75



Dimensions (mm)

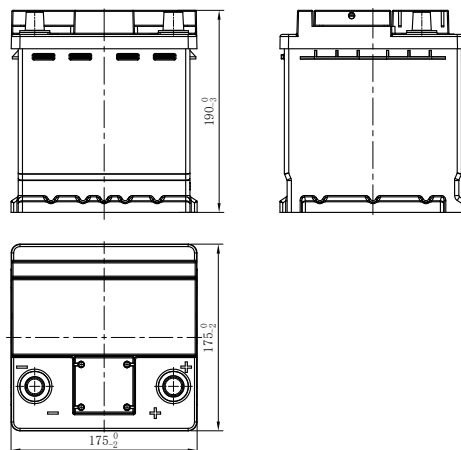

Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		40Ah
Dimension	Length	175+0/-2mm(6.89inches)
	Width	175+0/-2mm(6.89inches)
	Container Height	190+0/-3mm(7.48inches)
	Total Height(with Terminal)	190+0/-3mm(7.48inches)
Weight		Approx12.5Kg(27.6lbs)
Standard Terminal		1
Cell layout		0
Hold-Down		B13
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		/

Electrical Specification

Rated Capacity	20 hour rate(2.0A)	40Ah
Reserve Capacity	75	
Cold Cranking Performance Amps@0°F(-18°C)	500	

Standard Terminal (mm)


Cell Layout

Terminal Type	1	
POS NEG		Figure(0)

Discharge Characteristics(-18°C,0°F)

AGM-L0(CCA-SAE)
(CCA-SAE)Capacity Test(@-18)with I=500

Spec $U_{10S} \geq 7.5V$ $U_{30S} \geq 7.2V$

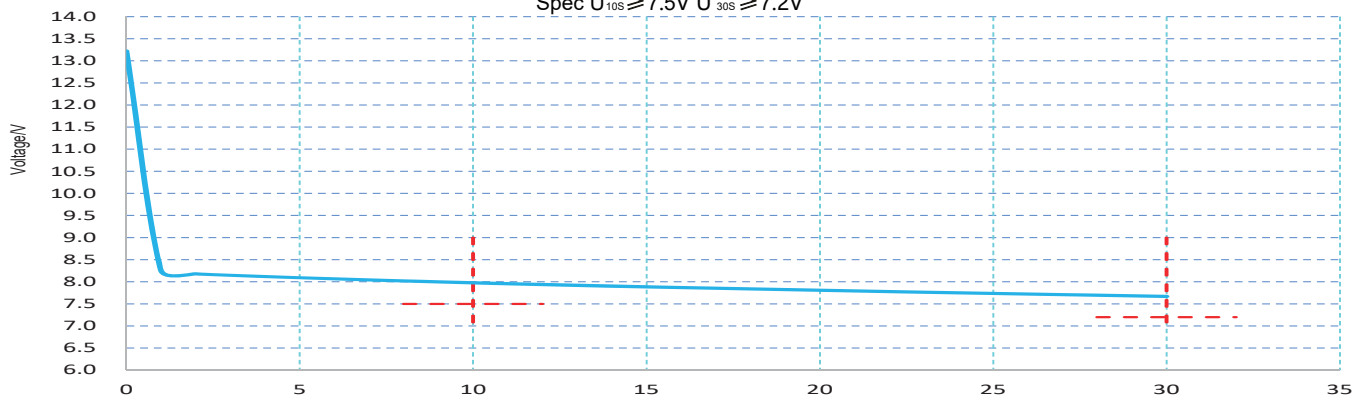

*Values are subject to variation of +/- 5% in normal manufacturing processes.

*Technical specifications and the product line above could be changed without prior notice.